

# Instructions for 0E-RLY6125A

## Product specifications


6 or 12VDC operation (*factory set for 12VDC—“SW1” jumper positioned to right. For 6VDC move left to 6VDC position.*)

120mA current draw “

5A/220VAC or 28VDC DPDT contacts

Dimensions: 2.75”L X 2”W X 1”H (70mm X 51mm X 25mm)

## Wiring for DRY CONTACTS:

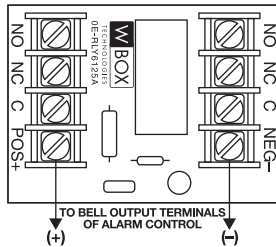

## Notice:


WBOX Technologies does not provide technical support for relay modules. Applications are numerous and diverse, and installation should be performed only by trained and experienced technicians.

**RELAY**


**6 OR 12VDC  
5A, DPDT**



## Wiring for LATCHING DRY CONTACTS:

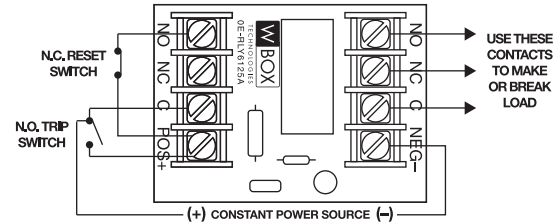

## Wiring for POLARITY REVERSAL:

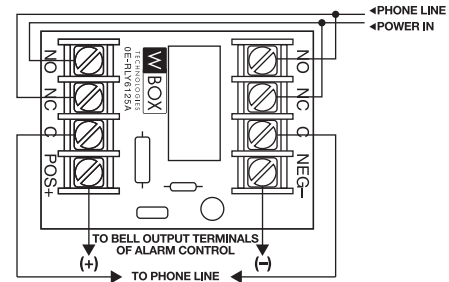

## Wiring for LINE SEIZURE:

