

Instructions for 0E-RLY12245A

Product specifications


12 or 24VDC operation (*factory set for 12VDC—“SW1” jumper positioned to right. For 24VDC move left to 24VDC position.*)

75mA current draw

5A/220VAC or 28VDC DPDT contacts

Dimensions: 2.75”L X 2”W X 1”H (70mm X 51mm X 25mm)

Wiring for DRY CONTACTS:



Notice:


WBOX Technologies does not provide technical support for relay modules. Applications are numerous and diverse, and installation should be performed only by trained and experienced technicians.

RELAY


**12 OR 24VDC
5A, DPDT**



Wiring for LATCHING DRY CONTACTS:

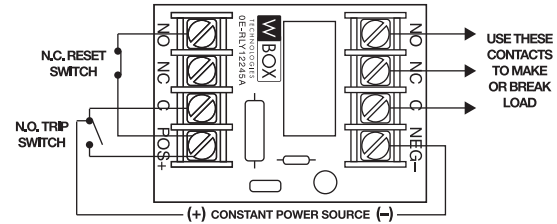

Wiring for POLARITY REVERSAL:

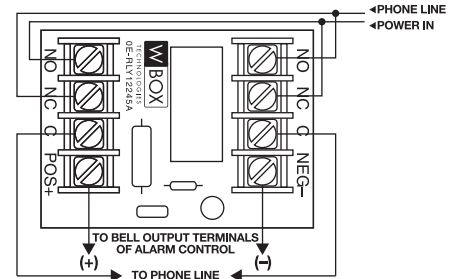

Wiring for LINE SEIZURE:

